
## H·E·R·O

## EC Series Piston Power Electronic Control Airless Paint Sprayers Models EC621, EC725

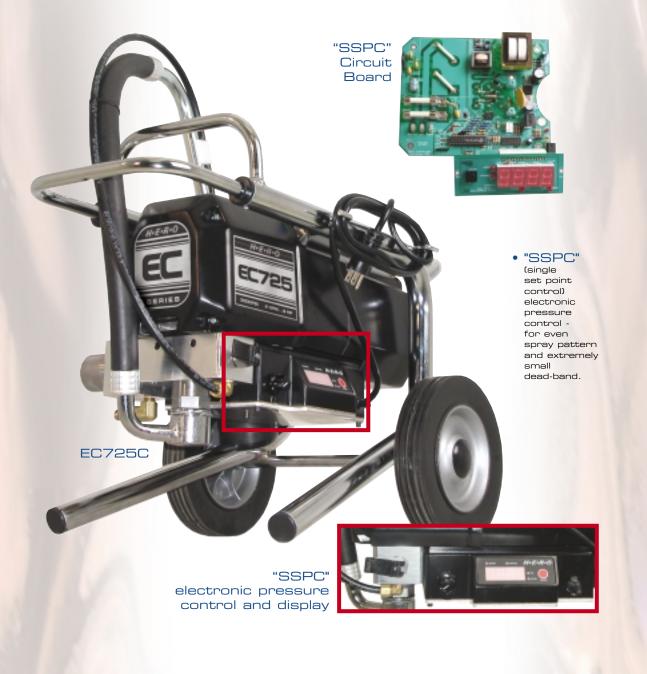

| Model | Maximum Output | Free Flow Output | Maximum Tip Size | Maximum Pressure | Motor/Engine Size |
|-------|----------------|------------------|------------------|------------------|-------------------|
| EC621 | .55 GPM        | .62 GPM          | .021             | 3000 PSI         | .8 HP ELECTRIC    |
| EC725 | .65 GPM        | .72 GPM          | .025             | 3000 PSI         | .9 HP ELECTRIC    |

Max output flow rate established with water at 2,000 PSI (138 bar) at the tip.

Models and specifications subject to change without notice

HERO INDUSTRIES A Division of Middlefield Bancorp Ltd HEAD OFFICE: 2719 Lake City Way, Vancouver, BC, Canada V5A 2Z6 TOLL FREE (800) 494-4376 Ph: (604) 420-6543 FAX: (604) 420-8725 E-mail: sales@hero.ca WEBSITE: www.hero.ca

## **EC** Series Piston Power **Electronic Control Airless Paint Sprayers** Models EC621, EC725





"Quick Change™ Fluid Section complete fluid section replaceable in the field in less than 5 min. with just one tool.

- Low maintenance costs - unmatched fluid section replacement cost
- Equipped with Hero Uni-tool - an all in one tool which is all you need to replace the fluid section
- Stainless steel piston and cylinder sleeve for corrosion resistance and longer packing life
- Long wear Hytrel, and Thiokol impregnated leather packings

Industrial duty DC electric motor, fan cooled, and totally enclosed

New Flip control prime valve for positive shut off, also serves as an emergency pressure release

Easy off removable zinc plated siphon assembly

"SSPC" (single set point control) electronic pressure control for even spray pattern and extremely small deadband.

Heavy duty all metal casting with compact designed chromed steel carts

- Backed by the best warranty in the business - Two year bumper to bumper
- Lifetime warranty on gear train and frame
- Ceramic ingo ball and reduces wear